



## EPS - Datasheet

### Series EPS/FC

EPS's microprocessor controlled Frequency Converter »EPS/FC« series is highly compact and rugged. It comes with a pure sine wave output with a low THD. There are units available with an output between 250 VA and 6000 VA. The AC/AC converters provide a single phase universal input 95-264V (from 300VA) and different output voltages and frequencies of 50, 60 or 400Hz. The units feature full electronic protection and low input and output noise. For example, the converter has an output overload protection (OLP) and a current limiting with short circuit protection. The components are also provided conformal coating for standard.

Common application fields are simulations of the electrical system to the testing according to customer conditions, avionic training simulations as well stationary 400Hz sine-wave power supplies in the field of service and production.

As an option e.g. are Power Fail Alarm (OF), ruggedizing against shock and vibrations (RG), remote shutdown (RS) as well as extended temperature range (CT -40°C until +70°C).

We also offer an optional modified line / load regulation  $\pm 2\%$  (LR).

Available are these converters (from 2kVA) optional as Chassis or 19"-Rack-mount versions. As standard, the converters are supplied with screw terminal block input/output.

The devices are CE, UL as well as CSA certified.

Energy efficiency: high efficiency, high MTBF

Scope of delivery:

AC/AC Converter

Operation Manual on request

## EPS/FC 4000-UM-19 AC/AC Frequency Converter

---



EPS/FC 4000 19rack

### General data

Technology	Switching
Operation modes	CV
Mains	97-264 VAC
Input frequency	47-63 Hz
Power factor	0.98
Input Current Limitation	Standard
Voltage Stability Load	±6% (0-100%)
Voltage Stability Mains	±6% (0-100%)
Overheat protection	Standard
Isolation In-/Output	2250VDC
Isolation Output/Enclosure	2250VDC
Cooling	Fan
Operation temperature	0-50°C
Humidity	5-95% n.c.
Design	19 inch
Standards	EN62368-1, EN55022, UL458, C22.2 No.107.1-01
ruggedized	Option EPS/F..RG

### Interfaces

### Technical data

Output Voltage	115 VAC
Output Current	35A

### Technical data

Output Power	4000 VA
Input Current	51A rms
Crest factor	2 max(90%)
Distortion	<5% (100%)
Output Frequency	400Hz
Efficiency	78%
Ripple U	<500mVrms (BW 20MHz)
Dimensions in mm (WxHxD)	432 x 132 x 432
Weight	16 kg
Order code	400286

### Options

Option 1	Output fail alarm Option EPS/F..OF
Option 2	Expanded temperature range EPS/F..CT
Option 3	Floating Output EPS/F..FO
Option 4	Chassis mounting



EPS/FC 1000\_1500 Chassis




EPS/FC 500 Chassis



EPS/FC 250



EPS/FC 3000-4500 19rack

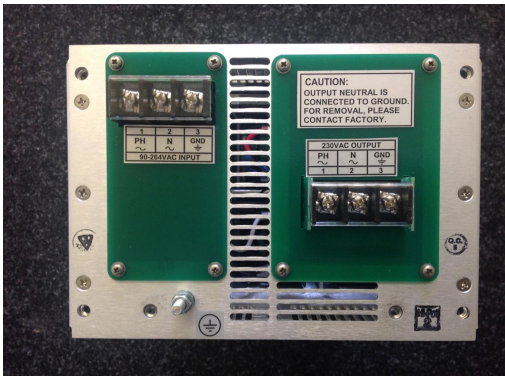

EPS/FC 1000 rear

OUTPUT												INPUT		
NOT USED	L1 ~	L2 ~	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED	GND	N ~	PH ~		
1	2	3	4	5	6	7	8	9	10	11	12			

EPS/FC200-300 Terminal

Subject to modification without notice, errors and omissions excepted

EPS Stromversorgung GmbH  
 Electronic Power Supplies  
 Alter Postweg 101, 86159 Augsburg/Germany  
 Tel.: +49 (0) 821 570451-0  
 E-mail: [sales@eps-germany.de](mailto:sales@eps-germany.de)  
[www.eps-germany.de](http://www.eps-germany.de)